

MP Series High Pressure



Flow Rate	Pressure	Strokes/mir	Strokelengt	Ø Pistor	Power	Valve
l/h 50Hz 60Hz	bar	50Hz 60Hz	mm	mm	kW	
25 -	75	120 -	17,5	16	0.25	1/2"Gm

Gm: Tread gas male BSPm.

Valves Type: SS 316: double ball check valve.

Pump Head: SS 316

Piston: SS 420



Valve Seats: SS 316

Piston Gaskets: Polyurethane

Standard Power Supply: 230-400V three phase 50Hz

Isolation Class: F

DIMENSION

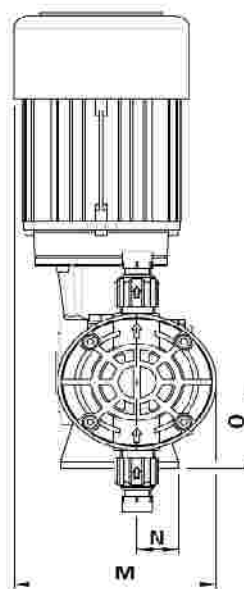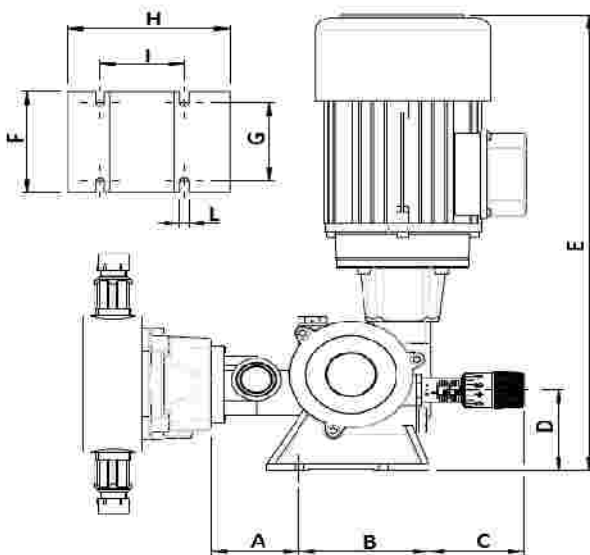

A	68
B	100
C	70
D	73
E	410
F	90
G	75
H	125
I	65
L	7
M	170
N	33
O	78

SAMPLE INSTALLATION

- A- Main Pipeline
- B- Injection Valve
- C- Backpressure Valve
- D- Pressure Gauge
- E- Plusation Dampener
- F- Relief valve
- G- Dosing Pump
- H- Tank Support
- I- Tanks
- L- Foot Valve



 **ETATRON D.S.**

HEAD OFFICE ITALY

Via Dei Ranuncoli, 53 - 00134 Roma ITALY

Phone +39 06 93 49 891 - Fax +39 06 93 43 924

e-mail: info@etatronds.com

www.etatronds.com